


## P.T.F.E. GASKET

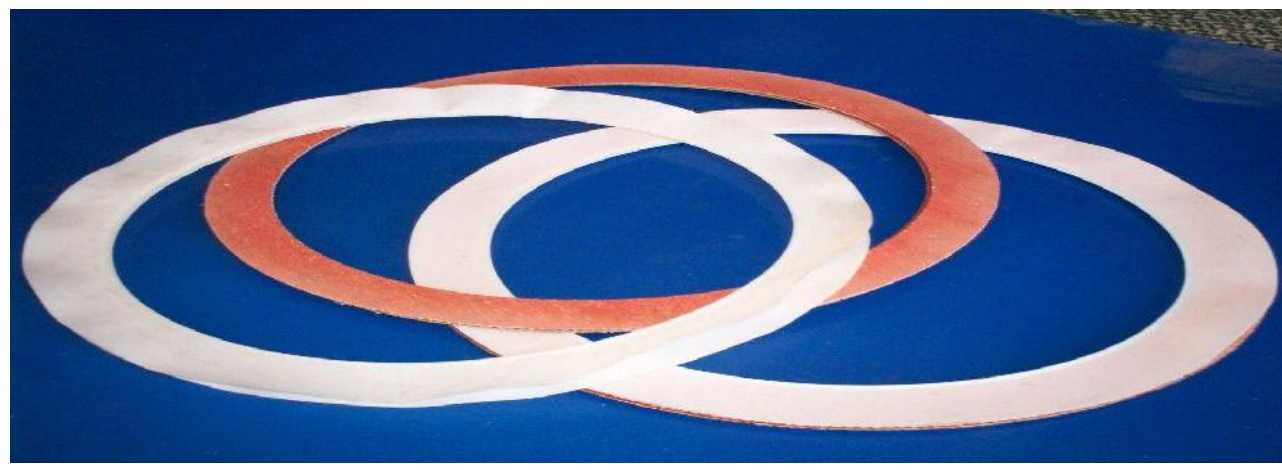

### Specification

- ❖ High temperature application like Reactors, Glass lined equipments Valves etc.
- ❖ In chemical plants, Pharmaceutical, Fertilizer plants where temperature is in range of 250 C require such type of gaskets. These are available in 0.5/0.75 thickness PTFE envelope with CAF/Rubber insert along with SS corrugated ring.
- ❖ Ring type & full face type in all sizes are available. (1 to 12 mm. Thickness)

## **PTFE Envelope Gasket with SS Ring**

- ❖ This soft flexible gasket and sealing material easily conforms to sealing surface imperfections with less torque than conventional materials.
- ❖ Expanded PTFE resists cold flow and creep while offering the widest range of sealability, chemical resistance, and temperature service of any material offered

### **Specification :**

- ❖ CAF or non asbestos insert in single piece construction up to 1900 mm o/d
- ❖ with ss 304 corrugated ring
- ❖ Tailor made sizes available for glass lined reactor or any application.
- ❖ Elliptical manway sizes 350 x 450 , 300x 400 available
- ❖ Ptfе envelope v type / c type with 0.7 mm thk